

DIGITAL, PROGRAMMABLE, PLUG & PLAY,  
IGBT DRIVER  
**2IPSE1A33-100**

FOR MEDIUM AND HIGH POWER IGBTs

**D A T A S H E E T**

InPower Systems GmbH

Am Kornfeld 11  
D-86932 Pürgen, Germany  
Tel: +49-(0)8196-93000  
Fax: +49-(0)8196-930020  
Email: [info@inpower-sys.com](mailto:info@inpower-sys.com)  
VAT-Id: DE 221021830

Prepared by: M. Wendt  
Approved by: P. Kviz  
Date of publication: July 2010  
Revision: 1.2  
Status: production


# TECHNICAL DOCUMENTATION

## 1. MAIN FEATURES

- Dual channel for dual- and multilevel topology
- Smart switching with variable gate resistors
- Tuned according to the application
- Reliable protection against
  - over-current in all short circuit conditions
  - over-voltage during turn-off
- Advanced control and protection functions
  - fdesaturation monitoring
  - di/dt monitoring
  - feedback clamping with active function
  - multiple soft shut down
  - supply voltage monitoring
  - digital input filter for switching signals
- DC/DC converter included
- Cable connection with adaptation board matched for every type of IGBT module



## 2. MECHANICAL DIMENSIONS

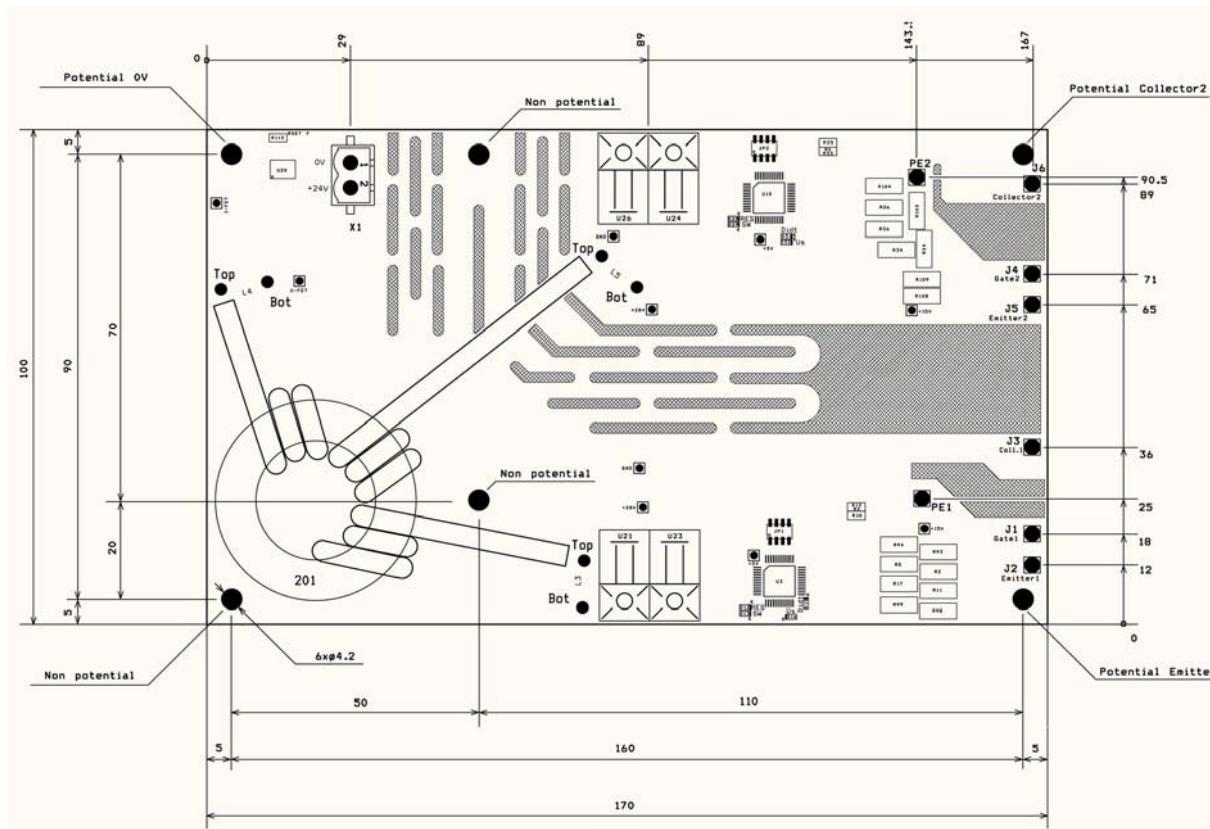

# TECHNICAL DOCUMENTATION



## 3. KEY DATA

Parameter	Symbol	Value (at +25°C)
Max. collector-emitter voltage	V <sub>CE</sub>	3300V
Input supply voltage range	V <sub>DC</sub>	+14 to +30V
Output voltage: ON/OFF voltage	V <sub>ON/VOFF</sub>	±15V
Isolation testing voltage (V <sub>AC</sub> RMS 50Hz / 1 min)	V <sub>ISOL</sub>	10000V
Switching frequency (max.)	f <sub>S max</sub>	120kHz
Peak output current	I <sub>G</sub>	±70A
Peak output power	P <sub>DC/DC</sub>	3W
Quiescent current typically	I <sub>DC</sub>	0.25A (at 15V)
Max. input current at max. load	I <sub>DC max</sub>	0.50A (at 15V)
Coupling capacitance primary/secondary side (max.)	C <sub>io</sub>	2pF
Switching frequency of isolated converter	f <sub>SMPC max</sub>	0.5MHz
Creepage distance		>61mm
Frequency of logic controller	f	20MHz
Operating temperature (measured on driver surface)	T <sub>OP</sub>	-40 to +85°C
Storage temperature	T <sub>ST</sub>	-40 to +85°C
Input driving and output error signal	optical	660nm
Turn-on delay time	t <sub>pdON</sub>	400nsec
Turn-off delay time	t <sub>pdOFF</sub>	400nsec
Typical time of soft shut down	t <sub>SSD</sub>	1-2μsec
Max. system time between fault detection and error notification	t <sub>SYS</sub>	100nsec
Time between detection of desaturation and gate voltage falling edge	t <sub>pDES</sub>	300nsec

## 4. INTERFACES

Interface	Part Type	Remarks
Optical Receiver	HFBR-2531Z (Avago)	For suitable connectors see
Optical Transmitter	HFBR-1531Z (Avago)	<a href="http://www.avagotech.com">www.avagotech.com</a>
DC supply on PCB	FKC 2,5/2-STF-5,08 (Phoenix )	Connector: MSTBV 2,5/2-GF-5,08 (Phoenix)

## 5. CABLE LENGTH

Max. length of coaxial cable: 30cm. Max. length of simple cable: 7cm.

For gate and auxiliary emitter connections use coaxial cable RG58 C/U with auxiliary emitter connected to the shielding. For power emitter and auxiliary collector it is recommended to use HV isolation cable, for instance Radox 9 GKW-AX, 1.5mm<sup>2</sup>.